


PLATINUM TOOLS®


SealSmart PROCON

Compression Tool

Instruction Sheet
P/N 16213C




1) Select the correct head position for the connector by rotating the head, (see FIG A).

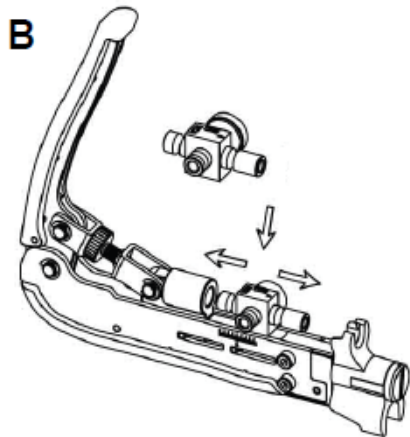


2) Open the handle and position the multi-head adapter per the connector type, F or BNC or RCA by snapping it out, select, and snap it back into the plunger. (see FIG B)

NOTE: When crimping RT Angles, use the BNC head.

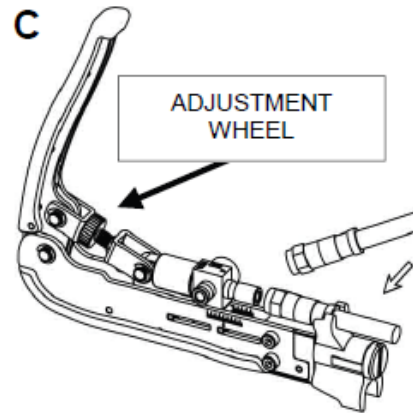

3) Insert the prepped connector & cable into the compression tool. (see FIG C) making sure connector is seated properly.

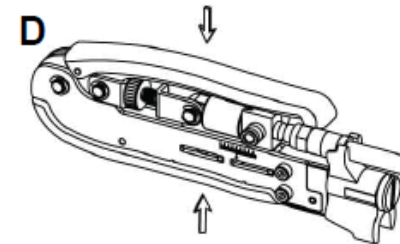

4) Squeeze the handles until fully closed, compressing the connector all the way, (see FIG D).

NOTE: The crimp stroke can be adjusted by turning the adjustment wheel in either direction, (see arrow in FIG C). Set your adjustment so when tool is fully closed, the connector is fully crimped.

The multi-head adapter is a replaceable part. Order P/N 16215C.

Visit our website for a selection of compatible connectors.
www.platinumtools.com

Applications:

Connector types: Coax cable types:

- | | |
|------------|-------------|
| • F | • RG-7 & 11 |
| • BNC | • RG-6 Quad |
| • RCA | • RG-6 |
| • RT Angle | • RG-59 |

©Platinum Tools, Inc. All rights reserved.
SealSmart PROCON IS 16213 1/11